FLOWLAB

FLOW RATE TEST RESULTS



Client: Aquaknight Industries Ltd

33 Leslie Avenue Sandringham Auckland 1025 New Zealand Date of Test: 16-Feb-2020

Date of Certificate: 05-10-2020

Certificate Number: FLV 015

Product Details

Model Number: 3100.176.1 Model Name: RD BE65


Inlet Size (mm): 65 Outlet Size (mm): 65

Description: Roof Drain Bottom Exit 65mm


Testing Conditions: PVC flange mounted flush into test plinth (datum)

Clamp Ring and grate installed Discharge to atmosphere

Grate Drawing

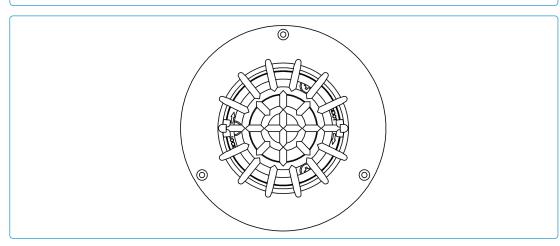

Installed Drawing

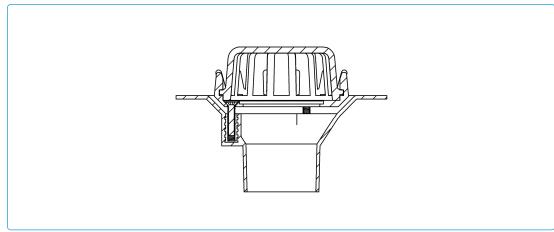








Flow Characteristic Curve



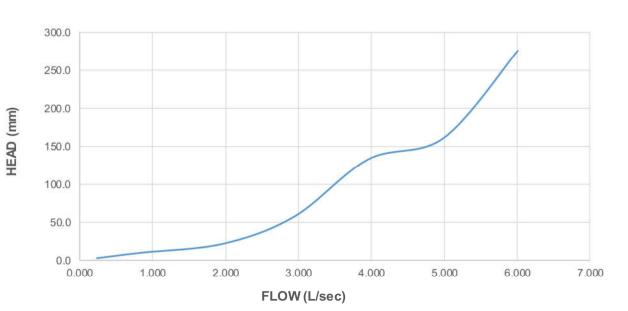

Flow Rate (L/sec)	Water Head (mmH2O)
0.234	3.7
0.842	10.8
1.970	22.7
2.949	58.6
3.957	133.5
4.995	161.7
6.010	275.7





© Flowlab Ltd 2020